




Boflex Stadium

THE ULTIMATE SPORTS FLOOR

- Designed by professionals for professionals
- Exceptional shock absorption for young athletes
- Unique construction impossible to overload
- Low build height

EN14904
Type A4

Build
height
28mm

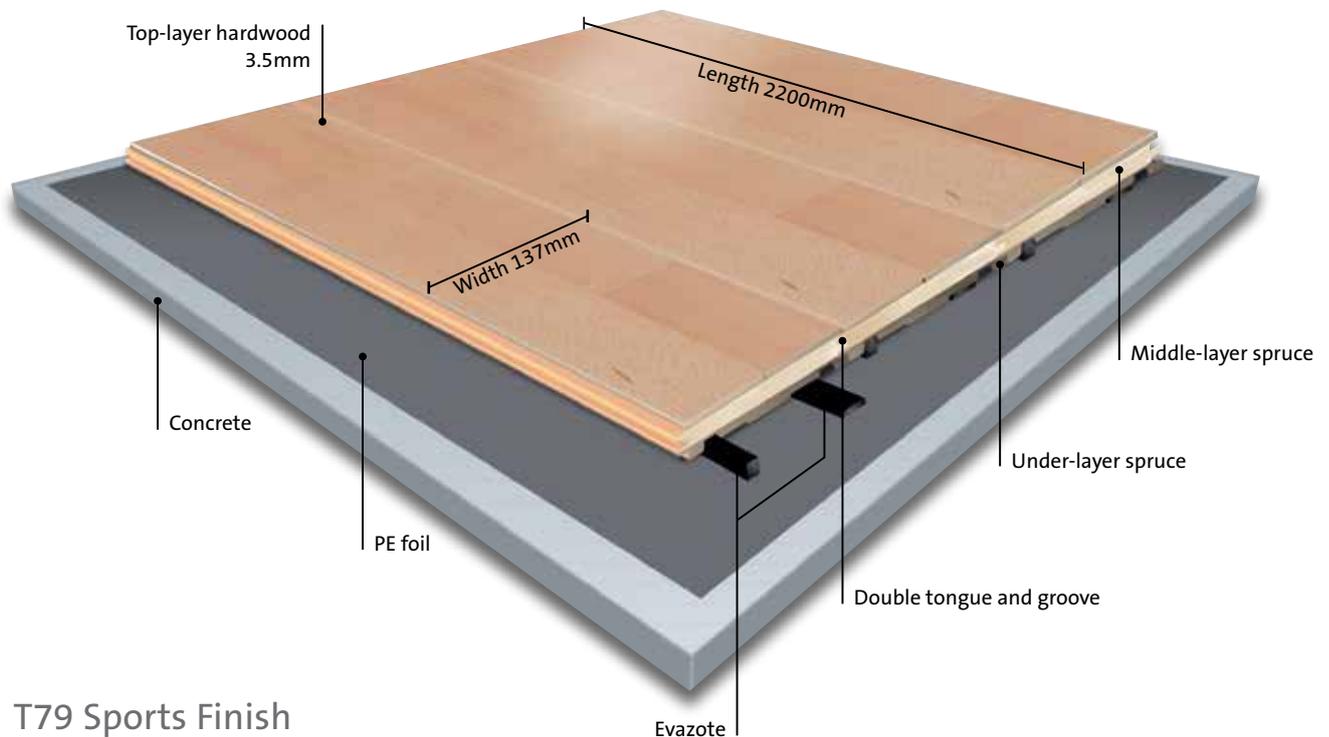

T79 Sports Finish
Squash Finish

The patented Boflex system has a built-in shock absorption material and the construction can withstand an unlimited load.

BOEN's engineered flooring construction is made up of a real wood top layer, a balancing softwood middle-layer which lies at the right angle to the top layer to give stability and a bottom softwood-layer.

Can be installed on an even and self supporting subfloor or on top of an existing floor.

Area-elastic sports floor

USAGE: Sports and multipurpose centres.

Suitable for installation over underfloor heating systems.

PERFORMANCE ACCORDING TO EN14904	SHOCK ABSORPTION	DEFORMATION	FRICTION	BALL BOUNCE	ROLLING LOAD MIN. 1500N
Boflex					
STADIUM	Type 4: 59%	Type 4: 2.5mm	86	96%	OK




Boflex Stadium

THE ULTIMATE SPORTS FLOOR



2-strip



Double tongue & groove

Wood species / Grading

Ash Sport *

Beech Sport *

Maple Can. Sport *

Oak Sport *

* FSC™ Mix 70%

Package overview

Pack Size: 6 boards = 1.81m² (21kg)
Pallet Size: 49 packs = 88.69m² (1029kg)

Supplied: Boflex adhesive and perimeter support battens.

We reserve the right to deliver up to 10% in lengths from 70cm to 150cm.

Boflex Stadium Construction Details (from the top to the edge of concrete/subfloor)

Height

Boflex Stadium • Hardwood Top-Layer 3.5mm • Middle layer and bottom layer • 2 strips of Evazote 50 are glued into the board.	Boflex size: 28 x 137 x 2200mm Boflex Stadium Board 23mm + Evazote 5mm (Board dimensions: 23 x 137 x 2200mm + Evazote dimensions: 10 x 10mm and 3.5 x 20mm)	28mm
Perimeter Strips	4.4 x 22 x 1500mm	✓
PE Foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm
Construction height		28mm

Maintenance

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC – The mark of responsible forestry.



www.realwood.eu



-part of the game!

boensport.com